



MODEL NO: ELTL1-D-SI-35-SO-4-S-W-DIM10

TYPE: .

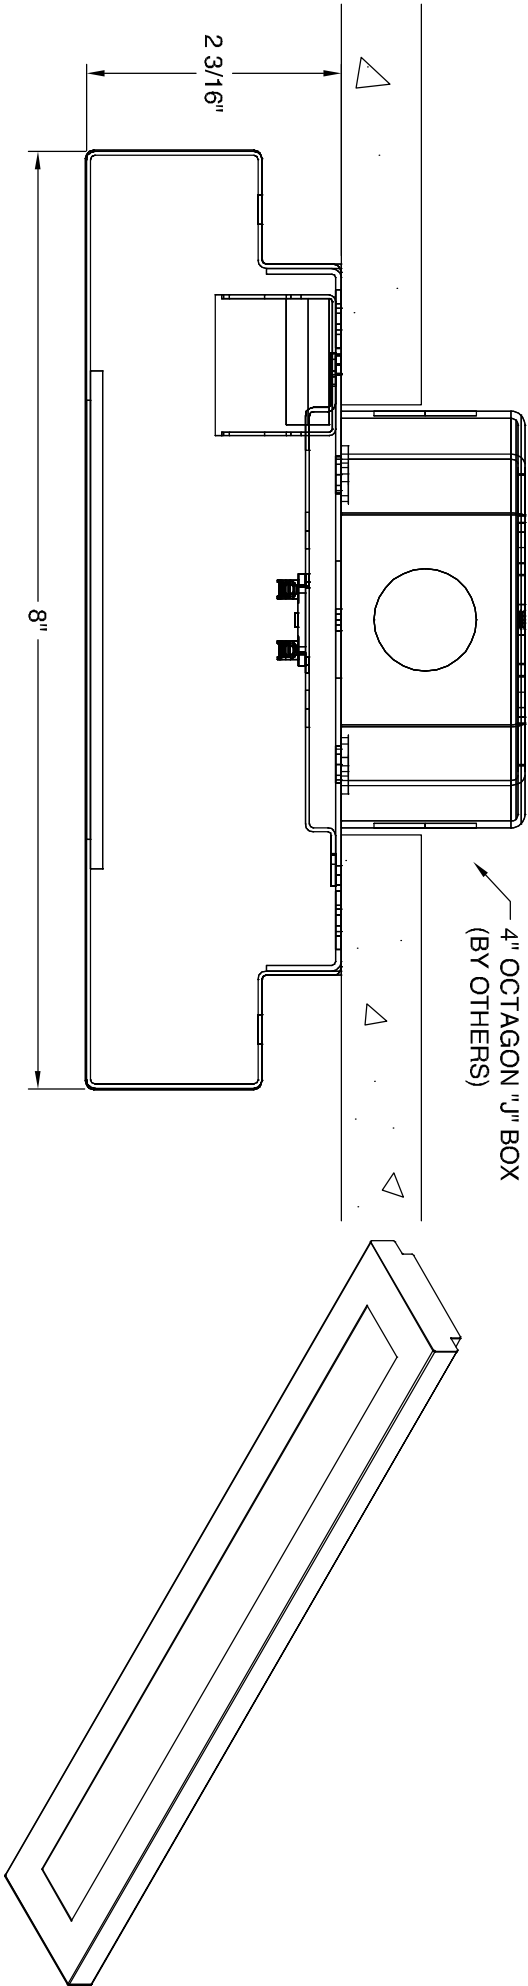

SPECIFICATIONS

- LUMENS** DIRECT APPROX. 700 DELIVERED LM/FT @ 7W/FT (SO)
- COLOR TEMP.** 3500K CCT; 80+ CRI; 3SDCM COLOR CONSISTENCY.
- MOUNTING** ADJUSTABLE A/C CABLE MOUNTED (AC)
LENGTH = 48" (STANDARD)
POWER FEED CONSISTING OF (3) 18 GA. WIRES (POWER) & (2) 22 GA. WIRES (DIM CONTROLS) (AC-PF18/3-22/2 / AC-NF2)
- CONSTRUCTION** EXTERIOR: EXTRUDED ALUMINUM ALLOY
INTERIOR: CODE-GAUGE STEEL INTERNAL COMPONENTS
- OPTICS** LED OPTIMIZED FLUSH LENS (FL)
- ELECTRICAL** MID-POWERED LEDs. LUMEN MAINTENANCE - L70 @ 50,000 HRS, ZHAGA COMPLANT.
CLASS 2 DRIVER, UNIVERSAL VOLTAGE 120/277 POWER FACTOR =>90%. LUMINAIRES PRE-WIRED WITH N.E.C./C.E.C. COMPLANT INTERNAL DRIVER DISCONNECTS.
- WIRING** SINGLE CIRCUIT UNLESS OTHERWISE NOTED. ALL ROW CONFIGURATIONS HAVE A QUICK CONNECT WIRE HARNESS FOR CONTINUOUS THRU-WIRE CONNECTIONS.
DIMMING 0-10V @ 1% (DIM10)
- COLOR** BAKED WHITE ENAMEL (W)
- CERTIFICATION** FIXTURE AND ELECTRICAL COMPONENTS ARE ETL LISTED AND CONFORM TO UL1598 IN USA AND CANADA. DRY LOCATION ONLY.
UNION MADE IN THE UNITED STATES OF AMERICA. I.B.E.W.

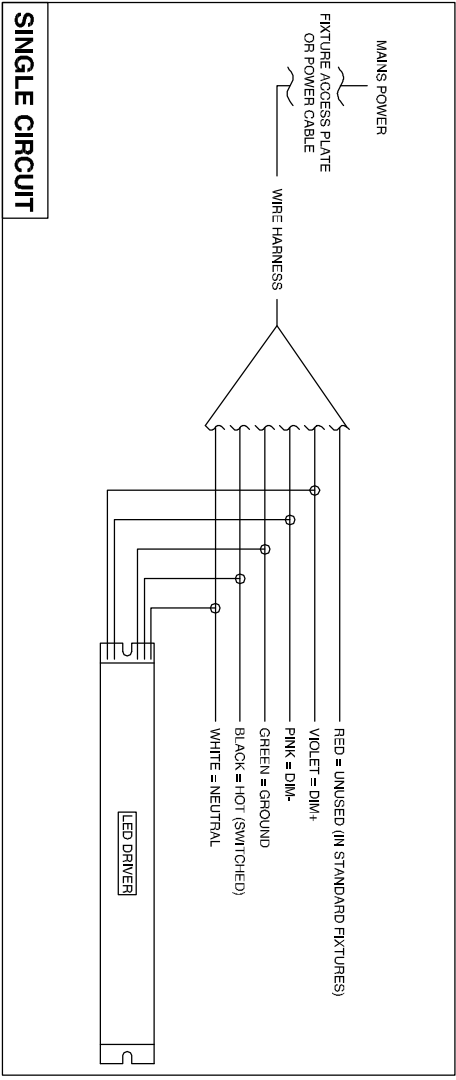

PROJECT DESCRIPTION				NOTE: ALL SPECIFICATIONS MUST BE CHECKED AND SIGNED OFF PRIOR TO PRODUCTION.			
ELITE 1 LED SURFACE MOUNT				MODEL NO.: ELTL1-D-SI-35-SO-4-S-W-DIM10			
DRAWN BY:	APPROVED BY:	DATE:	ORDER #:	DAY-O-LITE RESERVES THE RIGHT TO MAKE ANY MECHANICAL OR MATERIAL CHANGES TO THE FIXTURES WHICH DO NOT AFFECT THE APPEARANCE OR PERFORMANCE. CEILING AND WALLS TO BE ADEQUATELY REINFORCED TO SUPPORT FIXTURE WEIGHT. DAY-O-LITE IS NOT RESPONSIBLE FOR IMPROPER REINFORCEMENT. THIS PRINT IS THE PROPERTY OF DAY-O-LITE AND THE INFORMATION IT CONTAINS MAY NOT BE USED WITHOUT WRITTEN CONSENT OF DAY-O-LITE.			
MR		4/22/25					
FILE NAME:	SCALE:	PAGE:	SHEET 1 OF 1				
ELTL1-SURFACE	NTS						